


**Flowmeter Order codes:**

**0045 . T . H . P . 01 . T . A - J**

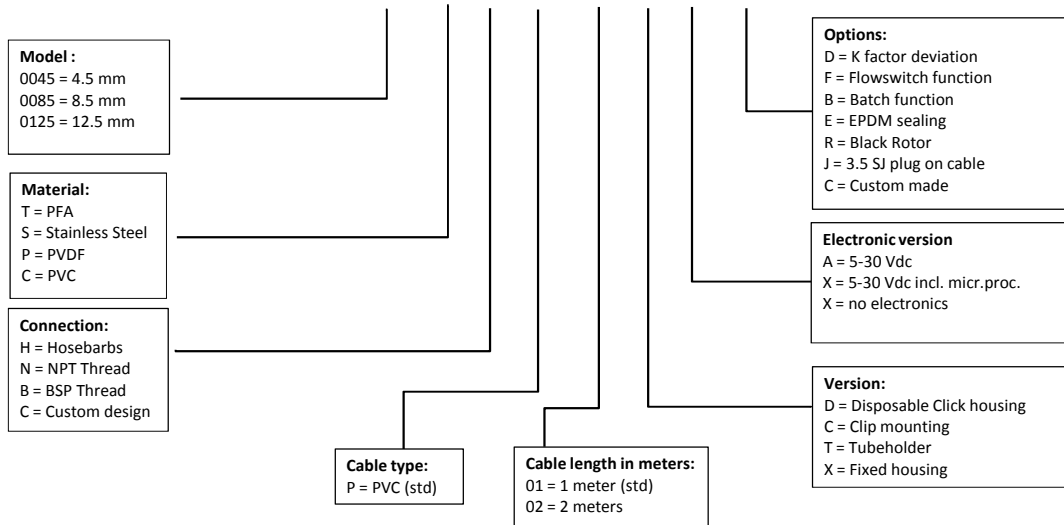

**Availability Flowmeter Electronics:**

A = Powersupply between 5 - 30 Vdc. ((No functional reprogramming possible)

X = Powersupply between 5 - 30 Vdc. Suitable for functional reprogramming, such as Flowswitch mode - Batch mode - K factor dividing  
For reprogramming functional settings, a flowmeter configurator is required.  
Standard, we provide all version with 5-30 V dc electronics and 1 meter cable.

**All Flowmeters standard:**

With 1 mtr PVC cable.  
Fixed and SS versions with Viton seals  
Standard Electronics 5-30 Vdc [A] without microprocessor / 1 meter PVC Cable  
Other specs and specialties on request.

**Delivery Conditions:**

Additional small order charge € 25.00 for orders under € 250.00  
Delivery strictly under Eqflow general terms of delivery  
All prices in Euro € without VAT and ex works  
Eqflow BV VAT nbr: NL802667995B01

**Please contact Eqflow BV at any doubt or question.**

Eqflow BV  
Po box 35  
NL 5370 AA Ravenstein  
The Netherlands  
T 0031 24 3792666  
E sales@eqflow.com  
www.eqflow.com